



OWNER'S MANUAL

RS-M68AX

6.5" MID-RANGE SPEAKER

4 Ω



Turkish Engineering Since 1985

SPECIFICATIONS

Nominal Diameter	6.74"/171.3mm
Nominal Impedance	4 OHMS
RMS Power Handling	250 Watts
MAX Power Handling	500 Watts
Sensitivity(1w/1m)	95db
Frequency Response	120~12KHZ
Recommended Lo Pass Crossover	120HZ
Pair or Single	Pair

MOTOR




Voice Coil Diameter	1.7"/44.7mm
Voice Coil Former	Kapton
Winding Material	Copper
Cone Material	Paper
Surround Material	Cloth
Magnet Material	Ferrite
Magnet Weight	47.3oz
Basket Material	Aluminum
Basket Color / Finish	Black

THIELE & SMALL PARAMETERS

Vas	4.1 L
Xmax	0.5mm
Fs	127.8Hz
Qms	4.73
Qes	0.41
Qts	0.38
Mms	11.9
Cms	0.13MM/N
BL	8.4TM
Le	140.786uH
Sd	149.6cm2
Re	3.0 Ohms

MEASUREMENTS

Overall Diameter	171.3mm/6.74"
Overall Depth	89.3mm/3.51"
Front Mount Baffle Cutout	Ø155/6.1"
Mounting Depth	78mm/3.07"
Motor Diameter	Ø140mm/5.51"

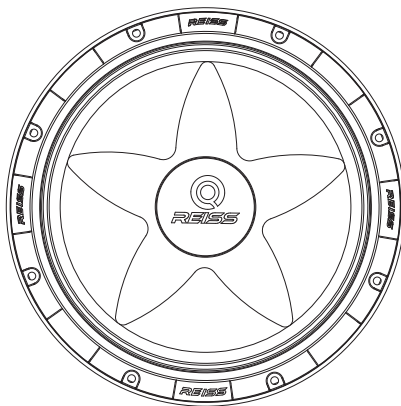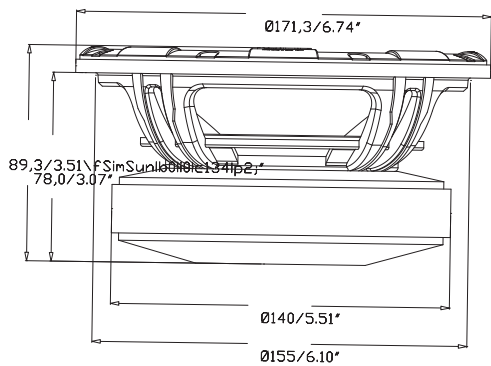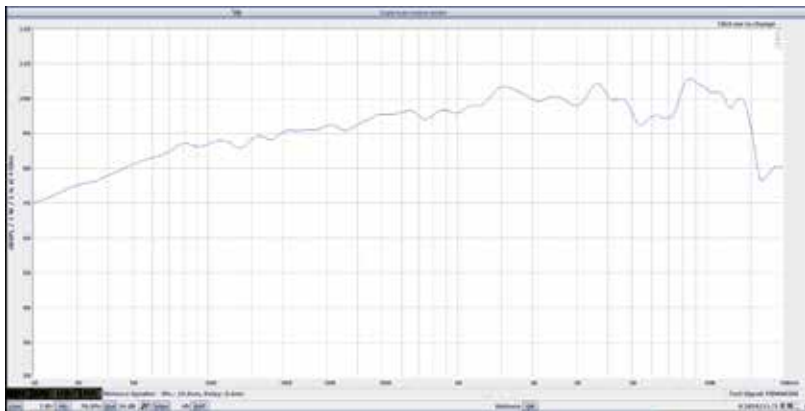



**FOR MORE INFORMATION
PLEASE VISIT
www.reissaudio.com.tr**

Turkish Engineering Since 1985

REİS ELEKTRONİK SANAYİ VE TİCARET A.Ş
İstoç Töptancılar Sitesi 15. Ada No:1-3-5-7
Mahmutbey Bağcılar / İstanbul - TÜRKİYE