




OWNER'S MANUAL

8" COAXIAL MIDRANGE SPEAKER

RS-M8SE / 4Ω

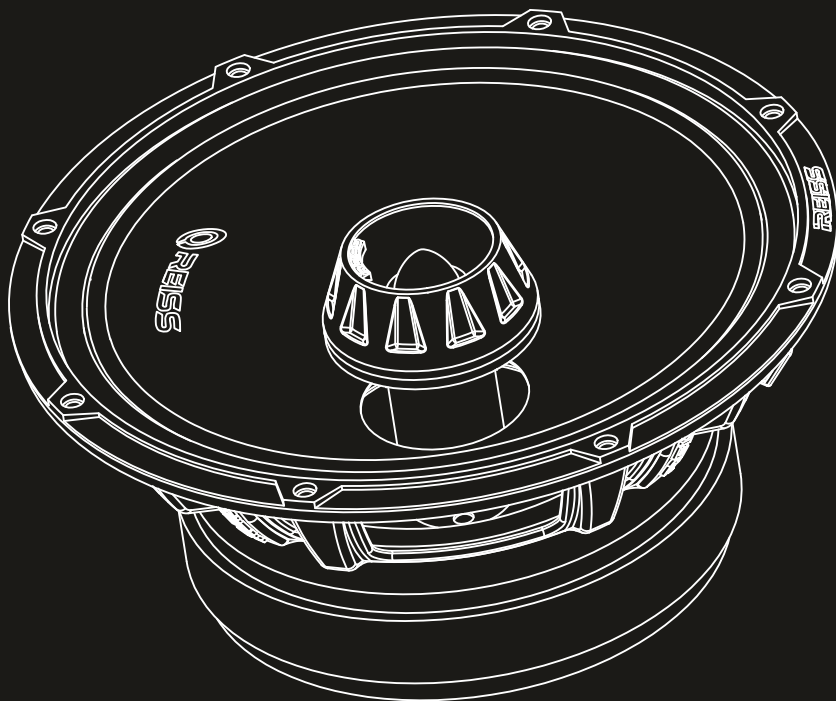

Since 1985
TURKISH ENGINEERING

8" COAXIAL MIDRANGE

SPECIFICATIONS

Nominal Diameter	8" / 200mm
Nominal Impedance	4 OHMS
RMS Power Handling	250 Watts
MAX Power Handling	500 Watts
Sensitivity(1w/1m)	97 dB
Frequency Response	75Hz - 20KHz
Recommended Lo Pass Crossover	80HZ
Pair or Single	Pair

MOTOR

Voice Coil Diameter	1.75" / 44.7mm
Voice Coil Former	TIL
Winding Material	Copper
Cone Material	Paper
Surround Material	Cloth
Magnet Material	Ferrite
Magnet Weight	50.2oz
Basket Material	Steel
Basket Color / Finish	Black

TWEETER SPECIFICATION

Voice Coil Diameter	1" / 25.4mm
Voice Coil Former	Kapton
Winding Material	CCAW
Diaphragm Material	Aluminium
Magnet Material	Neodymium
Magnet Weight	0.35oz


THIELE & SMALL PARAMETERS

Vas	20.671L
Xmax	5mm
Fs	74.304Hz
Qms	7.56
Qes	0.287
Qts	0.276
Mms	21.076g
Cms	217.682µM/N
BL	10.483TM
Le	115.8uH
Sd	258.60cm2
Re	3.2 Ohms


MEASUREMENTS

Overall Diameter (Without Grille)	216mm/8.5"
Overall Diameter (With Grille)	216mm/8.5"
Overall Depth (Without Grille)	95mm/3.74"
Overall Depth (With Grille)	102mm/4.02"
Front Mount Baffle Cutout	Ø190mm / 7.48"
Mounting Depth	85mm / 3.35"
Motor Diameter	Ø145mm/5.71"




8" COAXIAL MIDRANGE

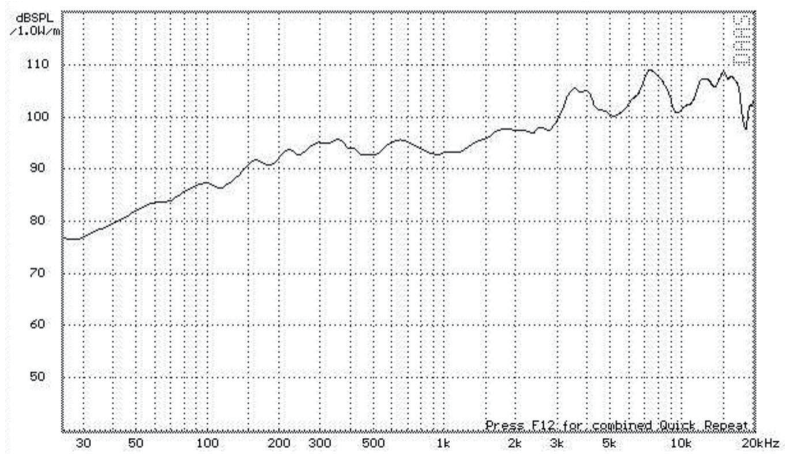

MEASUREMENTS
WITHOUT GRILLE

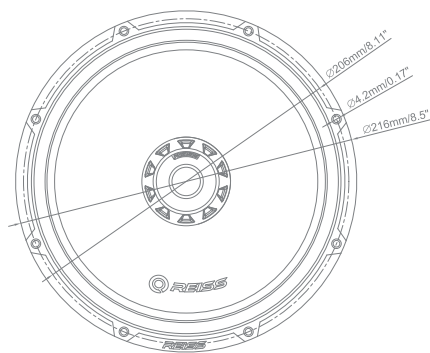

MEASUREMENTS
WITH GRILLE

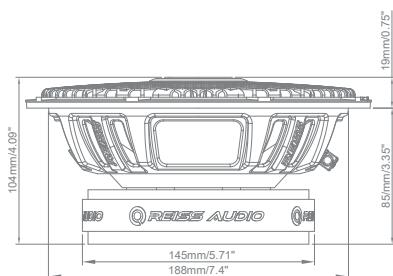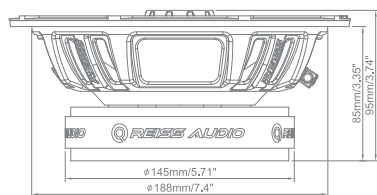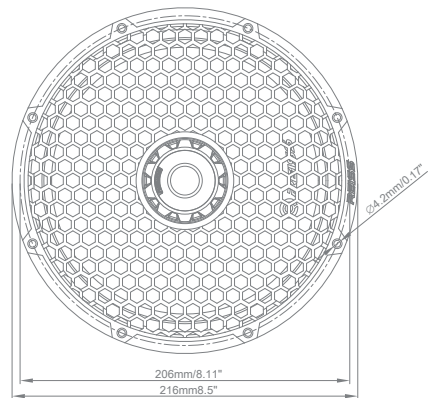



**FOR MORE INFORMATION
PLEASE VISIT**

Join Our Community



www.reissaudio.com.tr